

# MV-IDH7000B

## 1 MP Wireless Handheld Code Reader



### Introduction

MV-IDH7000B series wireless handheld code reader adopts code reading algorithm to provide good decoding capability for DPM. It can read different types of one-dimensional and two-dimensional codes, and output codes rapidly. It adopts illumination system to provide direct lighting and diffused reflection lighting. With adaptive smart bases, the device can realize charging and data communication.

### Key Feature

- Adopts code reading algorithm to provide good decoding capability.
- Provides good robustness to read codes with spots, defects and low contrast ratio.
- Adopts Bluetooth 5.0 wireless technology to provide convenient and efficient operations.
- With smart bases, parameter configuration and device management via IDMVS client software are supported.
- Adopts 3150 mAh battery to provide long battery life.
- Adopts illumination system to provide direct lighting and diffused reflection lighting.
- Supports IP65 and drop height of 1.8 m.

### Available Model

MV-IDH7010B-07-NR


### Applicable Industry

PCB, new energy, consumer electronics, semiconductor, automobile parts, etc.

### Accessories

- Smart base with network interface: MV-IDA-H70-IBASE-01L
- Smart base with USB interface: MV-IDA-H70-IBASE-01U

### Dimension

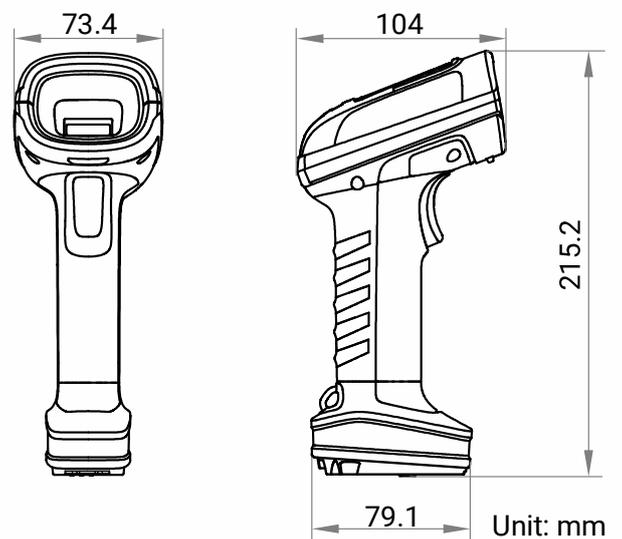

## Specification

<b>Model</b>	<b>MV-IDH7010B-07-NR</b>
<b>Performance</b>	
<b>Symbologies</b>	1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, ITF 14, ITF 25, UPCA, UPCE
	2-dimensional codes: QR Code, Data Matrix
<b>Min. accuracy</b>	3 mil
<b>Max. frame rate</b>	50 fps
<b>Sensor type</b>	CMOS, global shutter
<b>Pixel size</b>	3 $\mu\text{m}$ $\times$ 3 $\mu\text{m}$
<b>Sensor size</b>	1/4"
<b>Resolution</b>	1280 $\times$ 800
<b>Depth of field*</b>	Code 39 (3 mil): 15 mm to 60 mm, Code 39 (5 mil): 5 mm to 80 mm, Data Matrix (5 mil): 10 mm to 70 mm, Data Matrix (10 mil): 0 mm to 110 mm, QR Code (5 mil): 10 mm to 70 mm
<b>Field of view</b>	Horizontal 31°, vertical 20°
<b>Detection angle</b>	Tilt angle $\pm$ 60°, skew angle $\pm$ 60°, rotation angle 360°
<b>Symbol contrast</b>	20%
<b>Wireless communication</b>	
<b>Bluetooth</b>	BT 5.0, 2.4 GHz to 2.4835 GHz, BLE
<b>Wireless range</b>	100 m (open range)
<b>Electrical feature</b>	
<b>Battery</b>	3150 mAh, lithium battery
<b>Charging time</b>	Adapter charging: 4 h, USB charging: 8 h
<b>Number of scan</b>	26000 times (full charging)
<b>Power supply</b>	3.8 VDC (battery provides power)
<b>Max. power consumption</b>	Standby mode: 1.1 W@3.8 VDC, working mode: 6.4 W@3.8 VDC, sleep mode: 0.8 W@3.8 VDC
<b>Mechanical</b>	
<b>Focal length</b>	6.7 mm
<b>Lens mount</b>	M5.8-mount
<b>Ambient illumination</b>	0 lux to 100000 lux
<b>Light source</b>	Direct: white LED; diffused reflection: red LED
<b>Aiming system</b>	Cross laser aiming
<b>Prompt</b>	LED indicator, buzzer, vibrator
<b>Dimension</b>	73.4 mm $\times$ 104 mm $\times$ 215.2 mm (2.9" $\times$ 4.1" $\times$ 8.5")
<b>Weight</b>	Approx. 410 g (0.9 lb.)
<b>Ingress protection</b>	IP65
<b>Temperature</b>	Working temperature: -20 °C to 50 °C (-4 °F to 122 °F), storage temperature: -30 °C to 60 °C (-22 °F to 140 °F), charging temperature: 0 °C to 45 °C (32 °F to 113 °F)
<b>Humidity</b>	20% to 95% RH, non-condensing
<b>Drop height</b>	1.8 m (70.9")

## Specification

<b>General</b>	
<b>Client software</b>	IDMVS
<b>Certification</b>	CE, FCC

\*(Test condition: Environment temperature=25 °C (77 °F), ambient illumination=250 lux filament lamp, Hikrobot's test symbologies are used.)

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.